


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 26 TOWNSHIP 17 RANGE 3  
DATE: -7-13-00 6-23-05  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 2-12-99  
EDM

IN: S.P.C. E ZONE, NAD 83  
NAME: 17032601  
N: 516270.1510(m)  
E: 57379.0713(m)

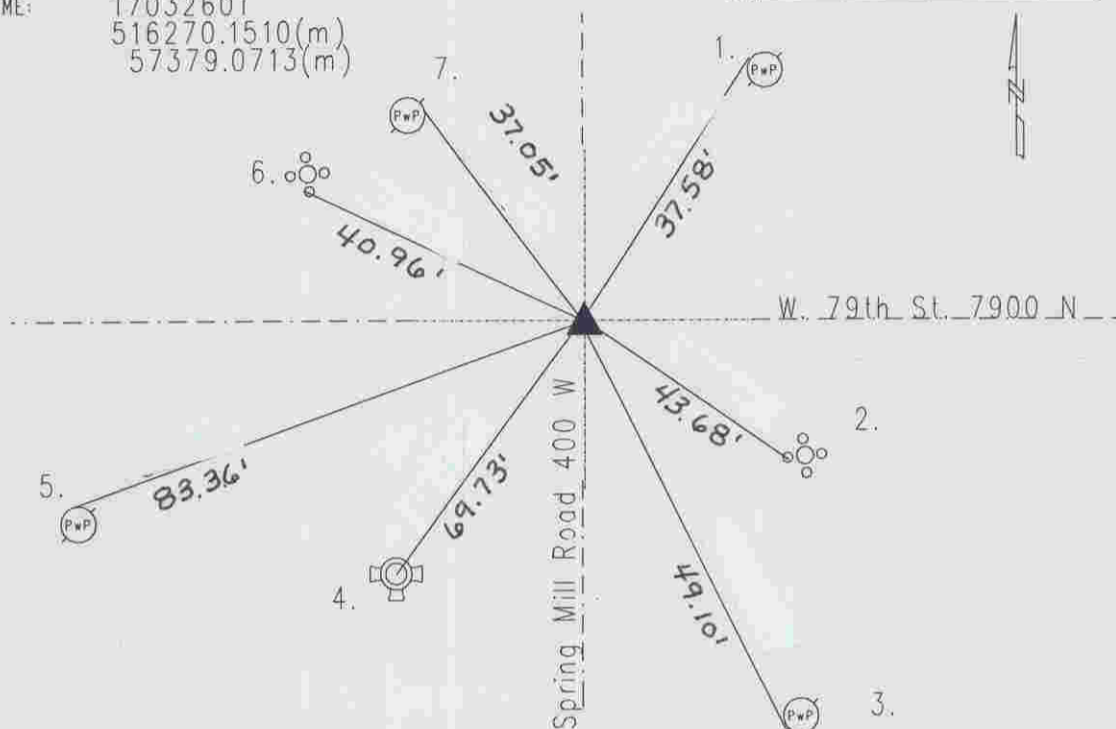

Original post set 1820 by Wm. B. Laughlin with witnesses: 12" hickory N 17 W 22 links, 19" beech S 12 W 11 links per Marion County Atlas pg. 8. Survey by Percy Hosbrook 2-17-1851 indicates no stone but witnesses: 16" beech S 65 W 48 links and 20" sugar S 81 E 14 links per Washington Township Legal Survey Book pg. 69. Survey by H.B. Fatout 3-8-1881 indicates the following witness: 24" beech N 69 1/2 E 75 links per Washington Township Legal Survey Book pg. 68. Woerner 9-13-48 called a lead plug. Gioscio 6-22-50 called a lead plug. G.W.S. 12-7-64 called a lead plug. Miller 3-3-76 called a road nail. Wilcoxen 6-13-78 called a road nail. Cleveland 5-14-80 called a PK nail. Gries 11-18-87 called a PK nail. Wilcoxen 2-12-99 called a PK nail. Excavated by Wilcoxen 9-16-99 and a 1" lead plug in concrete was found 8" down. Harrison set.

HC732601

REF.	DISTANCE	DESCRIPTION
1.	37.58'	Mag nail w/brass washer NW PwP#514-235 30"up
2.	43.68'	Cut 'x' W-bolt of aluminum pole base
3.	49.10'	Mag nail SW PwP#502-235 6"up
4.	69.73'	Top nut of fire hydrant
5.	83.36'	Road nail N PwP#28-235 12"up
6.	40.96'	Cut 'x' S-bolt of aluminum pole base
7.	37.05'	PK nail E lamp-pole PwP no# 12"up